

ABS-DWV

Pivoting P-Trap with union and cleanout

Product Features:

- Patented swivel elbow tilts to overcome pipe misalignment and offset fittings.
 - Leak-proof Polyethylene gasket
 - Saves installation time
- Large cap and opening makes cleanout fast and easy. No tools required.
- Compatible with other ABS-DWV fittings.



Description	HomeRite SKU	UPC Code	Master Pack	
Pivoting P Trap with Union and Cleanout	027012	622454255586	35	


IPEX
HomeRite®
products

1425 North Service Road East, Unit 3
Oakville, Ontario L6H 1A7
Toll Free: 800-463-9572 Fax: 905-844-0826
sales@ipexhomerite.com



Unlike any other P Trap on the market!

The gasketed ball joint union connection provides unequalled performance in even the most demanding installation conditions:

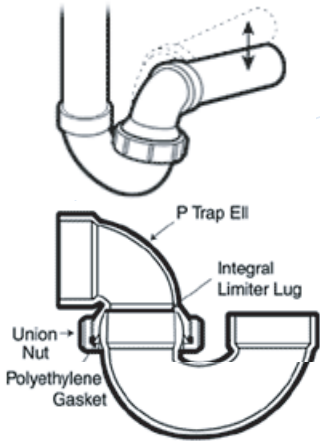

- Allows the P Trap Ell to pivot up to 10° from vertical in any direction (except directly backwards), providing the correct outlet slope for drainage.
- Customers can overcome installation problems such as pipe misalignment and offset fittings. Experienced contractors doing renovation work like the easy and time-saving solution to "someone else's mistake".

Other Features and Benefits

- Leak-proof polyethylene gasket connection.
- Oversized union nut can be hand tightened for a positive seal. No wrenches mean less damage or possible leaks.
- Extra large cleanout requires no tools to undo.
- Large trap for lost items to settle (rings etc.) without impeding drainwater flow.

A Top Performer! Test results confirmed that when leak tested in misaligned installations, the pivoting P Trap outperforms the top P Traps available on the North American market.

Merchandising Tips:

1. Display alongside other P traps in box or bin.
2. Display product sample on shelf tether to show the pivoting action.
3. When queried by DIY customers about P traps, ask if they can recall if the drain pipe they are attaching to is misaligned. Put a pivoting P trap in their hands and suggest it will eliminate an inferior installation using a regular fitting or having to return to the store to purchase the fitting solution they already have in their hand.

Material: ABS - compatible with ABS pipe and fittings. Install using ABS cement.

Approvals: CSA certified, IAPMO and NSF listed.

		L x W x H
Unit Dimensions:	cm	19.1 x 17.1 x 7.6
	in	7.5 x 6.75 x 2.00
Master Pack Dimensions:	cm	41.9 x 30.5 x 43.2
	in	16.5 x 12.0 x 17.0

Unit Weight:	kgs	.220
	lbs	.500
Master pack Weight:	kgs	8.200
	lbs	18.00